D A T A S H E E T

XTASI-output with 4T2™ Content-Player

XTASI-output is a pocket-sized **MPEG-Transport Stream** output device in robust aluminium housing.

The USB-powered modules turn a tablet computer into an economic broadcast measurement system.

XTASI-output features simulation of a broadcast chain with a single device while providing in-depth information on the transmitted content.

The **XTASI-output** hardware ships with the ABC **4T2™ Content-Player** application software, the most comprehensive IP, or file playback application on the market.

fields of use

- Testing of all elements in the broadcast chain
- Transport Stream playback for R&D labs, test, installation, or demonstration purposes

benefits

- Simple content-feed to any broadcasting equipment
- Hardware and Software from one supplier
- Compact, USB-powered device
- XTASI-Input sister-module available
- Command line package for scheduled, and automated testing
- stand-alone TS-frame output
- Optical status indicators

characteristics

- DVB-ASI output
- Comprehensive analysis features
- Supporting 64bit Windows®
- Multiple devices on a single computer supported

interfaces

DVB-ASI Connectors (EN50083-9)	BNC (female) - 75 Ω up to 214 Mbps
USB 2.0	Mini-socket, high speed

environmental

Operating temperature	0 ÷ 55°C (32 ÷ 131°F)
Storage temperature	-20 ÷ 70°C (-4 ÷ 158°F)
Humidity	0 to 95%, non condensing

physical and power

Length	100 mm / 3.9 in.
Height	16 mm / 0.6 in.
Width	42 mm / 1.7 in.
Weight	< 110g & 0.24 lbs
Power supply	USB 2.0, self-powered

package contents

XTASI-output module
Carrying pouch
USB high speed interface cable
4T2 Content-Player application (download)

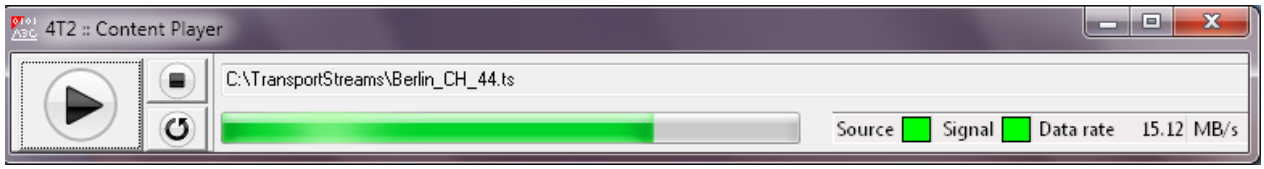

Advanced Broadcast Components Ltd
Richthofenstr. 29
31137 Hildesheim Germany
www.4T2.eu
+49 5121 289 279 4

© 2005 - 2012 · Advanced Broadcast Components Ltd. · all rights reserved · subject to change without further notice